


E-Line T6-15-6

GORMAN-RUPP E-LINE GENERAL DESCRIPTION



The Gorman-Rupp E-Line T6-15-6 is an electric driven self-priming centrifugal pump set for pumping clean, dirty and sewage water.

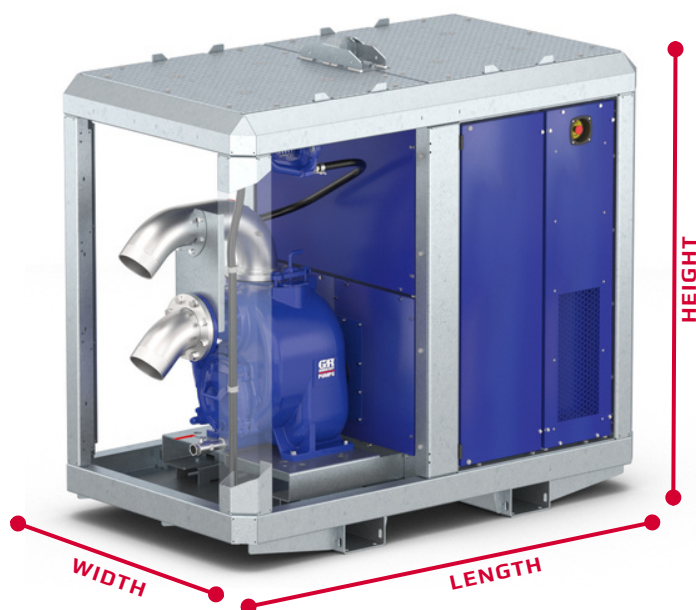

WEIGHT

Approx. 1650 kg

OPERATION

Control panel with main switch, emergency switch, pump on/off, hour counter and speed control. See rear side for more options.

COUPLING AND GUARD

Rubber tyre coupling, integrated protective guard


CHASSIS

Heavy gauge steel chassis, fully galvanized. Steel protective panels, galvanized, with an additional epoxy layer and powder coated RAL 5003 with a total dry film thickness of approx. 120 micron



PUMP

Gorman-Rupp T6A60S-B self-priming centrifugal pump



ELECTRIC MOTOR

15 kW IE4 Super premium efficiency electric motor with variable frequency drive (VFD) integrated in the pump set



IMPELLER

12,38" Impeller made of Ductile Iron 65-45-12
76,2 mm solid handling capacity



PERFORMANCE

Max. 300m³/h flow or
29 mWc discharge head



DIMENSIONS

6" x 6" BSP-T connection size
L: 2,26 m W: 1,25 m H: 2,02 m




SOUND

max. 75 dB, measured at 1 meter distance and 1 meter height



WARRANTY

5-year Gorman-Rupp warranty on the pump,
1-year on the motor and other components

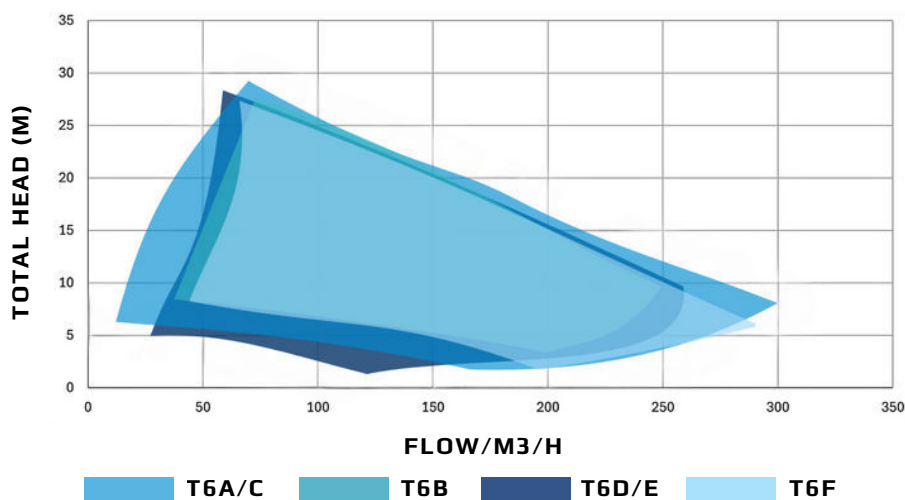

E line
Electric Powered Pumps

The Pump People®

*Pump performance curve is based on water with a SG=1.0 and without additional accessories.

WHERE BLUE MEETS GREEN



E-Line T6-15-6

GORMAN-RUPP E-LINE TECHNICAL SPECIFICATIONS



PUMP

Solids handling
Max. working pressure
Impeller
Bearing and seal cavity lubrication
Shaft sealing

T6A60S-B (Standard version, see curves and table below for optional hydraulics.
Check E-Line brochure page 42 for material codes)

76,2 mm
79 psi (545 kPa)
12,38" Semi-Open, Two Vane Ductile Iron 65-45-12
SAE 30 Non-Detergent Oil
Mechanical cartridge type seal with Silicon Carbide /
Silicon Carbide faces and Fluorocarbon FKM, (Viton® or
Equivalent) Elastomers.
Standard Plated Steel
Bearing and Seal Cavity Oil Level Sight Gauges
Gray Iron 30
Ductile Iron 65-45-12
Alloy Steel 4150
Alloy Steel 4130
Gray Iron 30
Gray Iron 30
Buna-N, with Compressed Synthetic Fiber,
Vegetable Fiber, PTFE, Cork and Rubber
Buna N

Fasteners
Oil sight glasses
Pump casing
Material Impeller
Impeller Shaft
Shaft sleeve
Seal plate
Bearing housing
Gaskets

O-Rings



AVAILABLE MODELS

<u>Model</u>	<u>Max. flow</u>	<u>Max. head</u>	<u>Impeller Type</u>	<u>Solid handling</u>	<u>Design Feature</u>	<u>Construction Materials</u>
T6A-15-6	300 m3/h	29 mWc	Semi-open, two vane	76,2 mm	Solids-handling (SH)	Cast Iron, CD4MCu, G-R Hard Iron
T6B-15-6	250 m3/h	27,5 mWc	Semi-open, six vane	32 mm	High efficiency (HE)	Cast Iron
T6C-15-6	165 m3/h	29 mWc	Semi-open, two vane	76,2 mm	SH + Eradicator®	Cast Iron, CD4MCu, G-R Hard Iron
T6D-15-6	260 m3/h	28 mWc	Semi-open, two vane	38 mm	High efficiency (HE)	Cast Iron
T6E-15-6	270 m3/h	28 mWc	Semi-open, two vane	38 mm	HE + Eradicator®	Cast Iron
T6F-15-6	300 m3/h	27,5 mWc	Semi-open, continuous vane	57 mm	Eradicator® Plus	Cast Iron

CHASSIS DESIGN

Chassis Heavy gauge steel chassis, fully
galvanized
Corrosion protection Hot-dip galvanized
Protective panels Steel protective panels, galvanized
with an additional epoxy layer and
powder coated RAL 5003

OPTIONS

Air Release Valve
High Temperature Shutdown Kit
Remote Control
Float Switch
Level Sensor
Custom Colors

ELECTRIC MOTOR

Brand WEG
Model W22
Maximum Power 15,0 kW
Efficiency Class IE4 Super Premium Efficiency
Variable Frequency Euradrive, integrated in the
Drive (VFD) pump set

CONTROL PANEL

Functionalities Main switch, emergency
switch, pump on/off, hour
counter and speed control
IP Rating of the Cabinet IP44
Earthing System 5 wire Terra-Neutral
Separated (TN-S)
connection
CEE Plug 32A 5P 400V

